


Transparent video totem  
LED透明广告机系列

坚固 通透 节能 易维护

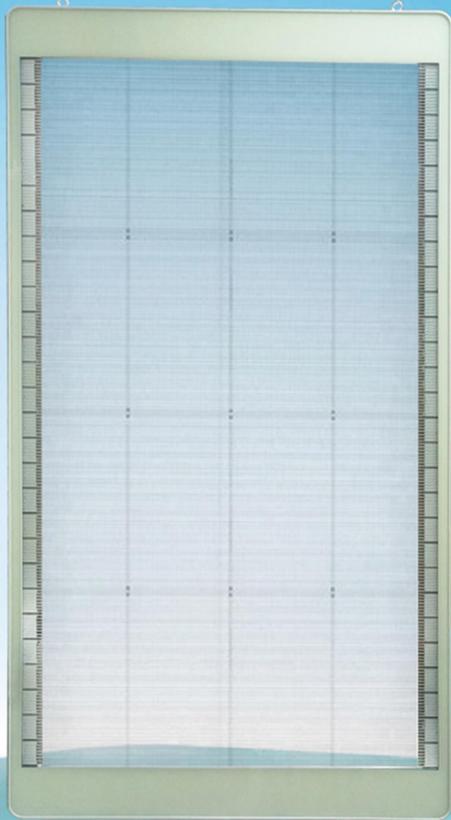

电话：15829551909  
邮箱：274405678@qq.com

Tech specs  
LED透明广告机技术参数

型号/Model	GJ-PH3.91	GJ-PH3.91	GJ-PH3.91	GJ-PH5	GJ-PH5
物理点间距/Pixel pitch	3.91mm-7.82mm	3.91mm-7.82mm	3.91mm-7.82mm	3.91mm-5mm	3.91mm-5mm
模块尺寸/Module size	L1000mm*H1500mm	L1000mm*H1750mm	L1000mm*H2000mm	L1000mm*H1500mm	L1000mm*H1750mm
像素密度/Pixel density	L256*H192	L256*H224	L256*H256	L256*H200	L256*H350
发光点颜色/Color	1R1G1B	1R1G1B	1R1G1B	1R1G1B	1R1G1B
最佳视距/ The optimal viewing distance	5 ~ 100m				
通透率/Transparency	70%	70%	70%	65%	65%
最大视角/Viewing angle	120° ~ 120°	120° ~ 120°	120° ~ 120°	120° ~ 120°	120° ~ 120°
屏体厚度/Thickness	8cm	8cm	8cm	8cm	8cm
平均功率/Average power	200w/m <sup>2</sup>				
最大功率/Max consumption	600W/m <sup>2</sup>				
刷新频率/Refresh rate	≥1920Hz	≥1920Hz	≥1920Hz	≥1920Hz	≥1920Hz
驱动方式/Drive mode	1/16S	1/16S	1/16S	1/16S	1/16S
白平衡亮度/White balance brightness	≥4000cd/m <sup>2</sup>	≥4000cd/m <sup>2</sup>	≥4000cd/m <sup>2</sup>	≥4500cd/m <sup>2</sup>	≥4500cd/m <sup>2</sup>
平均无故障时间/Mean time of failure	≥6500	≥6500	≥6500	≥6500	≥6500
寿命/life	100000	100000	100000	100000	100000
安装方式/Installation			吊装/Hanging		
防护等级/Protection class	IP45	IP45	IP45	IP45	IP45

型号/Model	GJ-PH5	GJ-PH6.25	GJ-PH6.25	GJ-PH6.25	GJ-PH7.82
物理点间距/Pixel pitch	3.91mm-5mm	6.25mm-6.25mm	6.25mm-6.25mm	6.25mm-6.25mm	7.82-7.82mm
模块尺寸/Module size	L1000mm*H2000mm	L1000mm*H1500mm	L1000mm*H1750mm	L1000mm*H2000mm	L1000mm*H1750mm
像素密度/Pixel density	L256*H400	L160*H240	L160*H280	L160*H320	L128*H224
发光点颜色/Color	1R1G1B	1R1G1B	1R1G1B	1R1G1B	1R1G1B
最佳视距/ The optimal viewing distance	5 ~ 100m	8 ~ 100m	8 ~ 100m	8 ~ 100m	8 ~ 100m
通透率/Transparency	65%	75%	75%	75%	80%
最大视角/Viewing angle	120° ~ 120°	120° ~ 120°	120° ~ 120°	120° ~ 120°	120° ~ 120°
屏体厚度/Thickness	8cm	8cm	8cm	8cm	8cm
平均功率/Average power	200w/m <sup>2</sup>	150w/m <sup>2</sup>	150w/m <sup>2</sup>	150w/m <sup>2</sup>	150w/m <sup>2</sup>
最大功率/Max consumption	600W/m <sup>2</sup>	450W/m <sup>2</sup>	450W/m <sup>2</sup>	450W/m <sup>2</sup>	450W/m <sup>2</sup>
刷新频率/Refresh rate	≥1920Hz	≥1920Hz	≥1920Hz	≥1920Hz	≥1920Hz
驱动方式/Drive mode	1/16S	1/8S	1/8S	1/8S	1/8S
白平衡亮度/White balance brightness	≥4500cd/m <sup>2</sup>				
平均无故障时间/Mean time of failure	≥6500	≥6500	≥6500	≥6500	≥6500
寿命/life	100000	100000	100000	100000	100000
安装方式/Installation			吊装/Hanging		
防护等级/Protection class	IP45	IP45	IP45	IP45	IP45



**商业橱窗和公共建筑空间:**

在连锁品牌店, 大型商场, 展览中心, 机场, 地铁站, 高铁站, 汽车4S店, 珠宝展示店, 银行等室内环境中, 理想保留了空间的视觉深度, 让LED透明屏的显示效果更具视觉冲击力和层次感。

**Trade display windows and public building space**

Glass curtain wall gain a good space visual effect indoor, such as in chain store, shopping mall, exhibition center, airport, metro station, automobile 4S shop, jewelry store, bank etc. which brings strong visual impact and sense of hierarchy for LED transparent display.

